
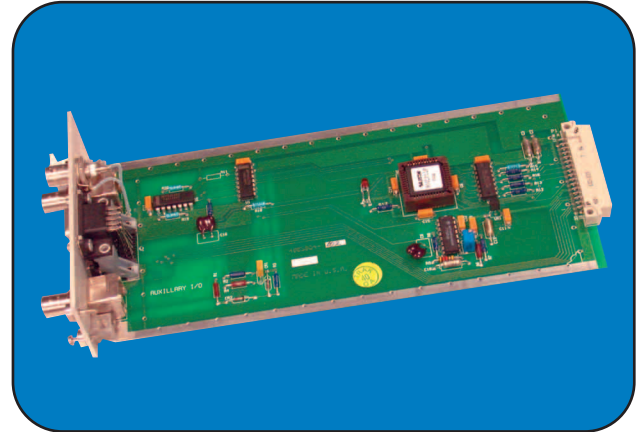


Application - Defense (Military) ■ SatCom ■ Wireless

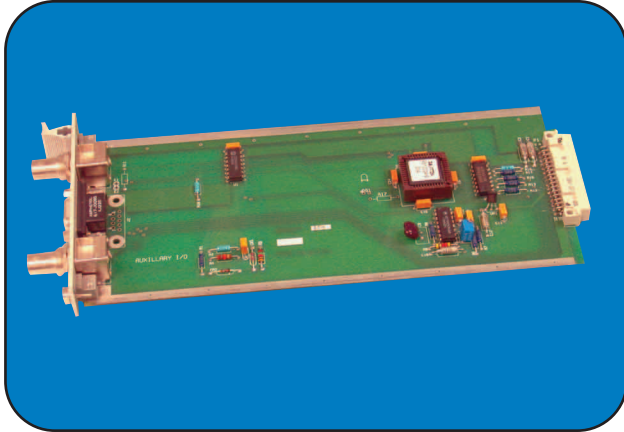

9003-1 Auxiliary I/O

The Model 9003-1 is included as standard with the Model 9000A and provides basic timing, RS-232/RS-422 communication functions, external standard input and reference 1 PPS output.

9003-2 Auxiliary I/O

The Model 9003-2 is included as standard with the Model 9000B and provides basic timing and RS-232/RS-422 communication functions the same as the Model 9003-1 with the addition of a fault status output and a printer port.

Specifications:

External Standard: 1 MHz, 5 MHz, or 10 MHz External Reference Input

1 PPS Out: Model 9000 1 PPS Reference Output. Front Panel Sets Positive or Negative Edge on Time. Output Level is TTL Into 50 Ω

RS-232: Status Outputs and Set Up Commands RS-422 Option Available at this Port

Connectors: BNC Female, External Standard and 1 PPS Output and 9 Pin "D" for RS-232 Port

Panel Space: One High

External Standard: 1 MHz, 5 MHz, or 10 MHz External Reference Input

1 PPS Out: Model 9000 1 PPS Reference Output. Front Panel Sets Positive or Negative Edge on Time. Output Level is TTL Into 50 Ω

RS-232: Status Outputs and Set Up Commands RS-422 Option Available at this Port

Status: Model 9000 Summary Fault Output, TTL Low For Fault

Printer: RS-232 Status Report to Printer

Connectors: BNC Female, External Standard, 1 PPS Output and Status 9 Pin "D" for RS-232/ Optional RS-422 Ports.

Panel space Two High

Specifications subject to change without notice.