

Time and Frequency

Dual RS-232 Serial Time Output for Models 9000 & 9000S


Model: 9010



Application - Defense (Military) ■ SatCom ■ Wireless

Description:

The Model 9010 has two independent RS-232 ports outputting time with a resolution of 1.0 ms. Time output of each port is available by request, continuously once per second, or continuously ten times per second.

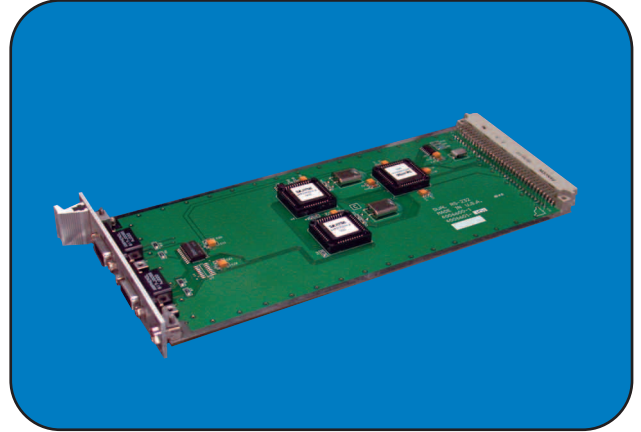

Specifications:

Message Format: 15 Character (D) DDDHHMMSSFFFQ <CR/CF>
12 Character (H) HHMMSSFFFQ <CR/LF>

Baud Rates: 600, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, and 76.8K

Connectors: 9 Pin "D" Type

Panel Space: One High

Specifications subject to change without notice.