

Time and Frequency Frequency and Time Reference Module Model: 8833-13




Application - Defense (Military) • SatCom • Wireless

- Mobile Radio Synchronization
- Secured Communications Systems

Features:

- GPS Disciplined Frequency and Time Reference
- Internal or External GPS Reference
- Low Phase Noise 10 MHz Reference
- Low g-Sensitivity 10 MHz DOCXO
- Ground Mobile Operating Environment

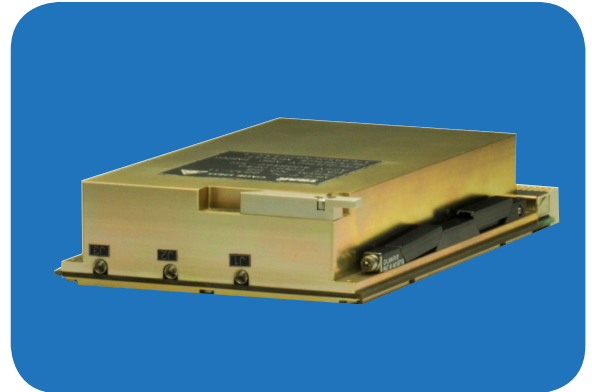

Description:

The Model 8833-13 is a tactical Frequency and Time Reference Module (FTRM) that incorporates a 50-channel GPS receiver, low g-sensitivity 10 MHz double oven crystal oscillator and time and frequency signal generation in 3U Compact PCI form factor. Outputs include 10 MHz, 1 PPS and Time of Day (TOD).

The FTRM can be synchronized from the onboard C/A code GPS receiver or from an external SAASM GPS 1PPS. Selection of the GPS reference source is automatic, with the external GPS being the primary reference and switching to the internal GPS in the absence of a valid external GPS 1PPS. Electronic override selection of the external or internal GPS is also provided.

While tracking GPS, a propriety discipline algorithm maintains time synchronization to ± 100 nS to UTC. In the absence of a GPS reference the FTRM transitions into holdover mode providing an accumulated time drift of ± 10 μ S in 24 hours after being synchronized to GPS for four hours or ± 10 μ S in 12 hours after being synchronized to GPS for two hours.

Control, status and TOD are available through an RS-232 I/O port.

Specifications

		Phase Noise:	10 Hz	-120 dBc
			100 Hz	-140 dBc
			1 kHz	-153 dBc
			10 kHz	-157 dBc
			100 kHz	-157 dBc
			1 MHz	-157 dBc
10 MHz Output				
Waveform:	Sinusoidal			
Level:	+2dBm, ± 1.5 dB			
Frequency accuracy while tracking GPS:	$\pm 1E-12$ (24 hour average)	Harmonic Distortion:	-40 dBc	
Frequency accuracy in holdover:	$\pm 1E-10$ /day	Spurious:	-100 dBc (300 kHz bandwidth)	
Thermal Stability:	$\pm 2E-9$	g-Sensitivity (per orthogonal axis):	$\pm 2.5E-10$	
		Number of outputs:	Two	
		Port to Port Isolation:	>70 dB	
		Connector:	GPO	

Specifications subject to change without notice.

TRAK Microwave Corporation

E-mail: sales@trak.com • www.trak.com

Ph: 813-901-7200 • Fax: 813-901-7491

4726 Eisenhower Boulevard • Tampa, FL 33634-6391 USA

© TRAK Microwave Corp.

smiths

bringing technology to life

Time and Frequency Frequency and Time Reference Module Model: 8833-13



1PPS Output

Pulse width: 100 μ S positive edge synchronized to UTC
Signal level: Differential RS-422
Accuracy to UTC: $< \pm 100$ nS
Accuracy during Holdover: $< \pm 10$ μ S in 24 hours after being synchronized to GPS for four hours or ± 10 μ S in 12 hours after being synchronized to GPS for two hours.
Number of outputs: Two
Connector: Compact PCI

Com Port

Signal levels: RS-232
Baud rate: 115,200
Data protocol: 1-start bit, 8-data bits, 1-stop bit, no parity
Connector: Compact PCI

1PPS Input

Function: SAASM GPS 1 PPS reference
Signal level: RS-422
Pulse width: > 100 nS positive edge synchronized to UTC
Connector: Compact PCI

GPS Receiver

Frequency: L1 (1575.42 MHz) C/A code
Channels: 50 independent, continuous tracking
Acquisition Time: < 30 Seconds
External Gain: 10dB to 50dB
Antenna Power: +5VDC (5 - 80 ma)
Connector: GPO

Power Supply Input

Voltage/Current:
+3.3 ± 0.1 VDC, 450 mA max, 250 mA nominal
+5.1 ± 0.2 VDC, 100 mA max, 35 mA nominal
+12.0 ± 0.75 VDC, 1.2 A max 420 mA nominal
Connector: Compact PCI

Environmental

Operating temperature: -40°C to +85°C
Storage temperature: -46°C to +85°C
Humidity: 0 to 95% non-condensing
Environment: Ground mobile

MTBF

119,000 hours @ +75°C, ground mobile environment per MIL-HDBK 217 Revision F, Notice 2

Physical

Size: 3U Compact PCI (100mm x 160 mm x 31.75 mm)
Weight: < 1.0 lbs
Construction: Conduction cooled Euro-card per VITA 30.1-200

Specifications subject to change without notice.