


Time and Frequency Auxiliary I/O Modules for Models 9000 & 9000S Model: 9003-7



Application - Defense (Military) • SatCom • Wireless

- Range Timing
- Communications Networks
- Satellite Ground Stations
- Test and Measurement Systems

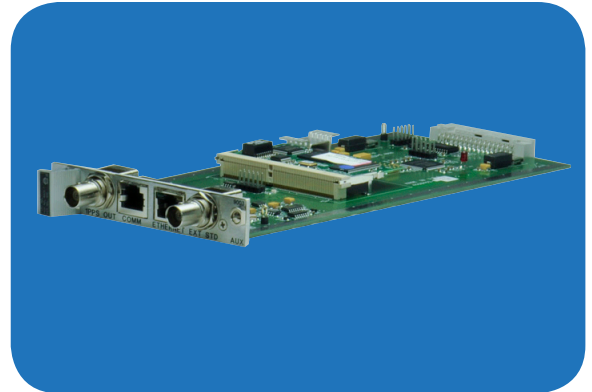

9003-7 Auxiliary I/O

The Model 9003-7 when installed into the Model 9000 's provides basic timing, RS-232/RS-422, Ethernet port, external standard input and reference 1 PPS output.

Specifications:

External Standard:	1 MHz, 5 MHz, or 10 MHz External Reference Input
1 PPS Out:	Model 9000 1 PPS Reference Output. Front Panel Sets Positive or Negative Edge on Time. Output Level is TTL Into 50 ohm
RS-232:	Status Outputs and Set Up Commands RS-422 Option Available at this Port
Ethernet Port:	10/100 Base-T, Telnet, FTP and NTP SNMP (supports v1, v2, v3)
Connectors:	BNC Female, External Standard and 1 PPS Output , RJ-11 for RS-232 Port, and RJ-45 for Ethernet Port
Panel Space:	One High

Specifications subject to change without notice.

TRAK Microwave Corporation

E-mail: sales@trak.com • www.trak.com

Ph: 813-901-7200 • Fax: 813-901-7491

4726 Eisenhower Boulevard • Tampa, FL 33634-6391 USA

© TRAK Microwave Corp.

smiths

bringing technology to life