


Time and Frequency Distribution Modules for Models 9000 & 9000S Model: 9006-3



Application - Defense (Military) • SatCom • Wireless

9006-3 4- Channel + 10 Vdc Pulse Driver

The Model 9006-3 provides four separately buffered 1PPS outputs at +10Vdc level, 20 microsecond pulse width in accordance with ICD-GPS-060 rev B.

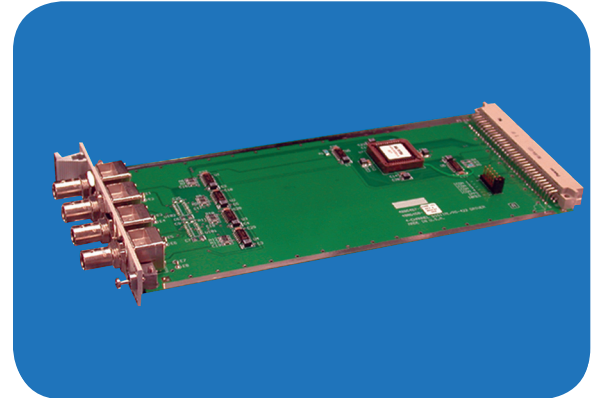

Specifications:

Levels:	"0", 0 ± 1.0 Vdc "1", 10 ± 1.0 Vdc
Pulse Width:	20 Microseconds \pm 1 Microsecond
Rise Time:	<50 Nanoseconds
Fall Time:	<1 Microsecond
Drive:	50 Ω
Panel Space:	One High

Specifications subject to change without notice.

TRAK Microwave Corporation

E-mail: sales@trak.com ♦ www.trak.com

Ph: 813-901-7200 ♦ Fax: 813-901-7491

4726 Eisenhower Boulevard ♦ Tampa, FL 33634-6391 USA

© TRAK Microwave Corp.

smiths

bringing technology to life