


Time and Frequency 4 Channel Linear Driver for Models 9000 & 9000S Model: 9008



Application - Defense (Military) ■ SatCom ■ Wireless

Description:

The Model 9008 provides four separately buffered frequency/time code outputs from a single input signal. This module can use outputs from other modules via a four-channel back plane bus system. Two output driver types are offered and configurations are listed below. Consult Factory for available output connector types.

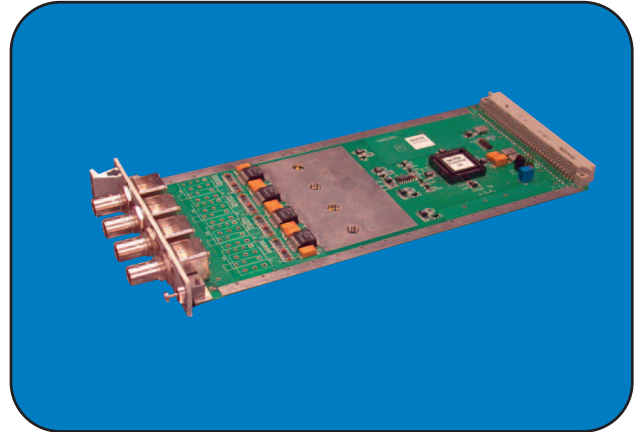

Specifications:

9008-1: Direct Coupled Outputs, DC - 10 MHz, 50 Ω Loads, 10 V_{p-p} Into 50 Ω

9008-3: Transformer Coupled Outputs, Isolated Ground, 100 Hz - 10 KHz, 600 Ω Loads

Panel Space: One High for 9008-1 and 2 High for 9008-3

Specifications subject to change without notice.