


Dual RS-232 Serial Time Output for Models 9000 & 9000S Time and Frequency Model: 9010



Application - Defense (Military) • SatCom - Wireless

Description:

The Model 9010 has two independent RS-232 ports outputting time with a resolution of 1.0 ms. Time output of each port is available by request, continuously once per second, or continuously ten times per second.

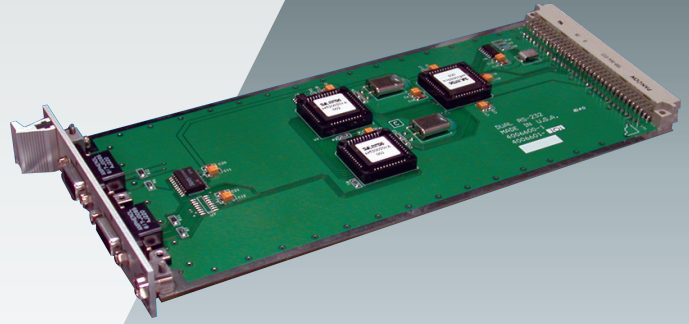

Specifications:

Message Format:	15 Character (D) DDDHHMMSSFFFQ <CR/CF> 12 Character (H) HHMMSSFFFQ <CR/LF>
Baud Rates:	600, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, and 76.8K
Connectors:	9 Pin "D" Type
Panel Space:	One High

Specifications subject to change without notice.