


### Application - Defense (Military) • SatCom - Wireless

#### 9011 Telecom Generator, T1 or E1, Framed or Clock

The Model 9011 generates T1 or E1 telecom signals per ITU and other worldwide standards. Telecom signals are output as either framed “all ones” or clocks of 1.544 MHz or 2.048 MHz. The following standard telecom outputs are available:

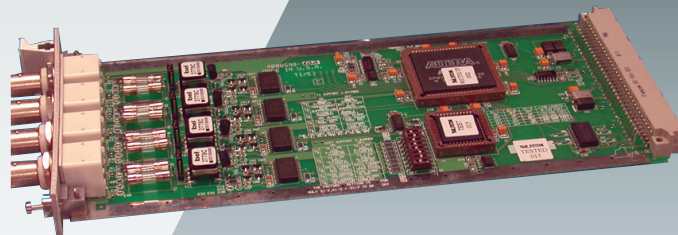

- 9011-1 T1 With Twin BNC Connectors
- 9011-2 E1 With Twin BNC Connectors
- 9011-3 T1 With Terminal Block
- 9011-4 E1 With Terminal Block
- 9011-5 T1 With Wire-Wrap
- 9011-6 E1 With Wire-Wrap

Above modules produce framed outputs and call for clock output only versions.

Specifications:	
Accuracy:	Equal to the Model 9000 Internal OCXO
Connectors:	Terminal Block, Wire Wrap or Twin BNC
Panel Space:	One High
Accuracy:	Equal to the Model 9000 Internal OCXO
Panel Space:	One High

Specifications subject to change without notice.