


Time and Frequency Sine Wave Generator Module for Models 9100 & 9300 Model: 9109



Application - Defense (Military) • SatCom • Wireless

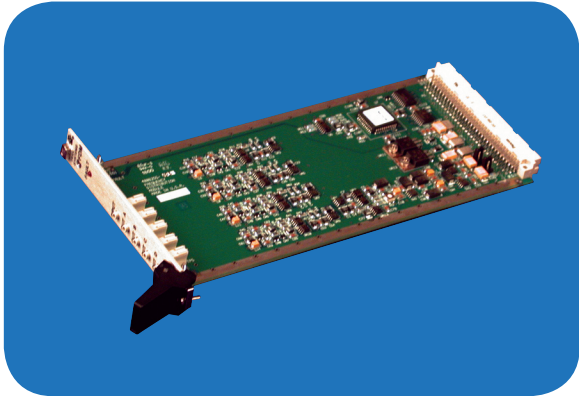

Model 9109 SRG

The Model 9109 SRG module generates four 5 MHz reference frequencies derived from the selected GPS Reference module's 10 MHz reference frequency.

Specifications:

Output Frequency: 5 MHz
Stability Reference: Same as selected 10 MHz reference

Spurious Harmonic: < -50 dBc
Non-Harmonic: < -80 dBc

Level: Fixed, 1 Vrms (+13 dBm), ± 2 dB

Drive: 50Ω


Outputs: 4 Each

Phase Noise: D-OCXO

10 Hz	-120 dBc
100 Hz	-125 dBc
1 kHz	-130 dBc
10 kHz	-135 dBc
100 kHz	-135 dBc

Phase Noise: Rubidium

10 Hz	-100 dBc
100 Hz	-125 dBc
1 kHz	-130 dBc
10 kHz	-135 dBc
100 kHz	-135 dBc

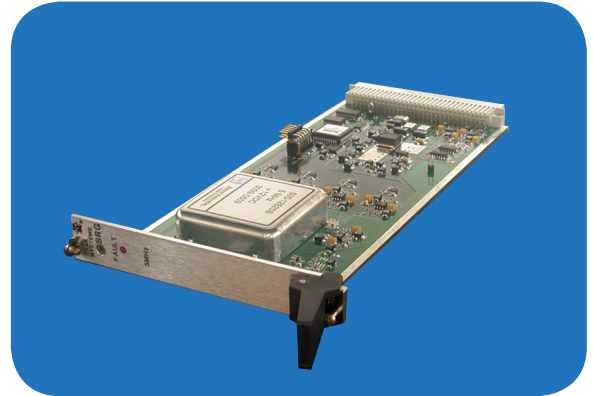

Model 9109 Low Phase Noise Sine Wave Generator

The Model 9109-5 10 MHz Low Phase Noise Sine Wave Generator module is designed for critical reference frequency applications requiring low phase noise and low spurious content. In this module, a 5 MHz or 10 MHz low phase noise ovenized crystal oscillator is phase locked to the Model 9100 system reference, effectively isolating system noise, and providing excellent phase noise and spurious performance.

Phase Noise:	1 Hz carrier offset, -90 dBc
	5 MHz and 10 Hz carrier offset, -135 dBc
	100 Hz carrier offset, -150 dBc
	1 KHz carrier offset, -160 dBc
	10 KHz carrier offset, -165 dBc
	100 KHz carrier offset, -165 dBc

Spurious: ≥ -100 dBc

Harmonic Distortion: -35 dBc

Output Voltage: 1.0 V RMS (+13 dBm), ±2 dB, Fixed output levels

Isolation: -70 dBc, output to output

Outputs: Four on BNC female connectors

Impedance: 50Ω

Models: 9109-4 5 MHz Output
9109-5 10 MHz Output

Specifications subject to change without notice.

TRAK Microwave Corporation

E-mail: sales@trak.com • www.trak.com

Ph: 813-901-7200 • Fax: 813-901-7491

4726 Eisenhower Boulevard • Tampa, FL 33634-6391 USA

© TRAK Microwave Corp.

smiths

bringing technology to life