


Time and Frequency Terminator and Fault Logic Module for Model 9300 Model: 9350



Application - Defense (Military) ■ SatCom ■ Wireless

The TFL module, in conjunction with the Model 9360 Input Interface Module, selects operational mode and is the fault collection point for distribution module faults. In addition, it provides serial communications to the Model 9100 or external RS-232/RS-422 (optional) devices in the stand alone mode.

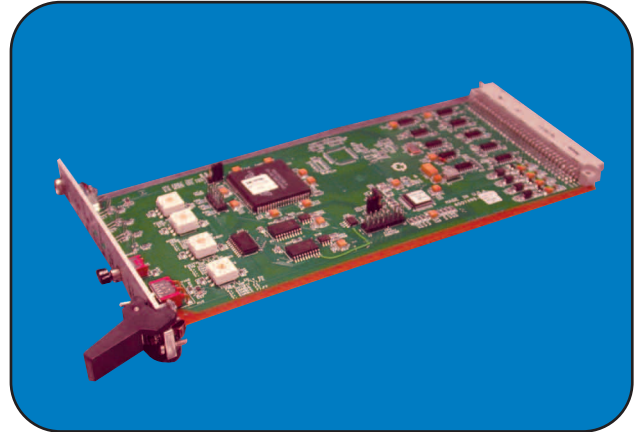

Specifications:

Mode Select

Internal Switch: Use With Model 9100, Redundant
 Use With Model 9100, Non-Redundant
 Stand-Alone, Redundant Inputs
 Stand-Alone, Non-Redundant Inputs

RS-232/RS-422 I/O (Optional)

Message Format: Consult Factory For Details

Baud Rate: 9600, Fixed

Data Bits: 8

Parity: None

Stop Bits: 1

Specifications subject to change without notice.