
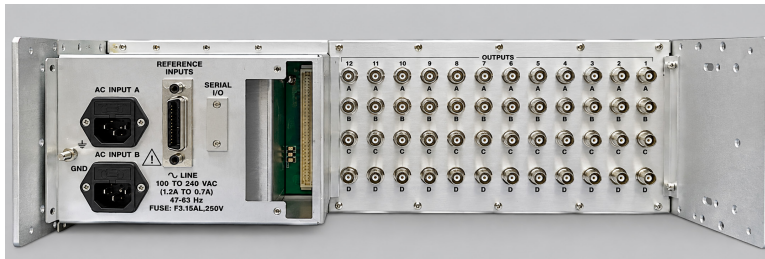


Time and Frequency / Modular Distribution Unit / Model: 9300-7G

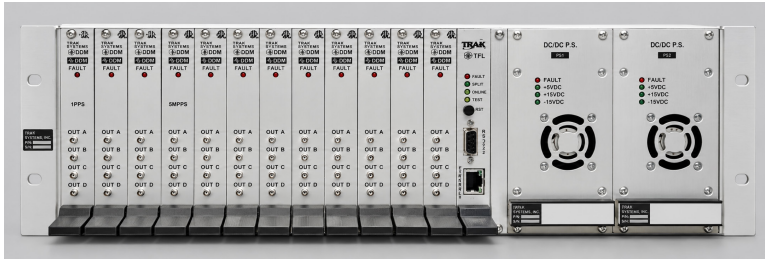

Key Features

- Model 9100 Expansion or Stand-Alone Unit
- Digital, Frequency, Time Code Distribution
- 12 Module Positions Available for 48 Outputs
- Modules "Hot Swappable"
- RoHS Compliant

Applications

Defense (Military) • SatCom • Wireless

- Communications Networks
- Satellite Ground Stations
- Mobile Radio Synchronization
- Station/BITS Clock
- Test and Measurement Systems

Description

The Model 9300 is designed for two modes of distribution. One is distribution expansion for the Model 9100, effectively extending its bus structure into the Model 9300. As many as four Model 9300's may be connected to a single Model 9100, with Fault/Status reporting through the Model 9100. The other mode is stand alone distribution. This mode permits operation without a Model 9100, with customer supplied timing signal inputs either from redundant or non-redundant sources. The Model 9300 has 12, four channel distribution module positions providing a maximum of 48 signal outputs. Digital, Frequency distribution and power supply modules from the Model 9100 are utilized in the Model 9300. A rear panel plug-in Input Interface Module (IIM) allows a wide variety of input signal and status configurations. Included with the IIM is a Terminator and Fault Logic module (TFL). The TFL provides correct input signal termination, mode set up, and a Fault/Status communications port. Both redundant and non-redundant configurations are available.

Model 9300-7G Main Frame

The Model 9300-7G Main Frame consists of a metal enclosure containing only a passive, connectorized backplane assembly and Input Interface Module. All functional modules plug into front positions, while interface and power connectors are located on the rear panel. Distribution and power supply modules from the Model 9100 operate in the Model 9300.

Specifications

Distribution Module Slots	Twelve
Terminator And Fault Logic Module Slots	Two, One Supplied As Standard
Power Supply Module Slots	Two, One Supplied As Standard. Both AC and DC Input Options.
Input Interface Module Slot	One, Rear Panel
Dimensions	5.22 High (3U), 19 Inches Wide, And 15 Inches Deep
Weight	25 Pounds With Full Complement of Modules
Finish	Clear Anodized Aluminum
Operating Temperature	-30° C to +60° C, With Modules
Humidity	95% Relative, Non-Condensing, With Modules

Specifications subject to change without notice.



www.trak.com



Follow Us

Distribution Modules

Model 9106-16G	4-Channel Digital Distribution Module (DDM), TTL Levels
Model 9107-16G	4-Channel Frequency Distribution Module (FDM), Sine Wave and Time Code Distribution

Terminator and Fault Logic Module

Model 9350-7G	The TFL module, in conjunction with the Model 9360 IIM, selects operational mode and is the fault collection point for distribution module faults. In addition it provides serial communications to the Model 9100 for fault status.
---------------	--

Input Interface Module

Model 9360-7G	The IIM is essentially an input patch panel to route external input timing signals to appropriate internal signal buses.
---------------	--

Power Supply

Model 9120-26G	Universal AC Power Input, 100 to 240 VAC (<i>AC option: 9300-7G</i>)
Model 9121-16G	DC Power Input, 20 to 60 VDC (<i>DC option: 9300-7DCG</i>)

Specifications subject to change without notice.



www.trak.com



[Follow Us](#)



TRAK TECOM

Request Pricing • www.trak.com

Ph: 813-901-7200

Email: solutions@trak.com

4726 Eisenhower Blvd, Tampa, FL 33634